



SPEAKER CASE 2 LIMITED RANGE REAR

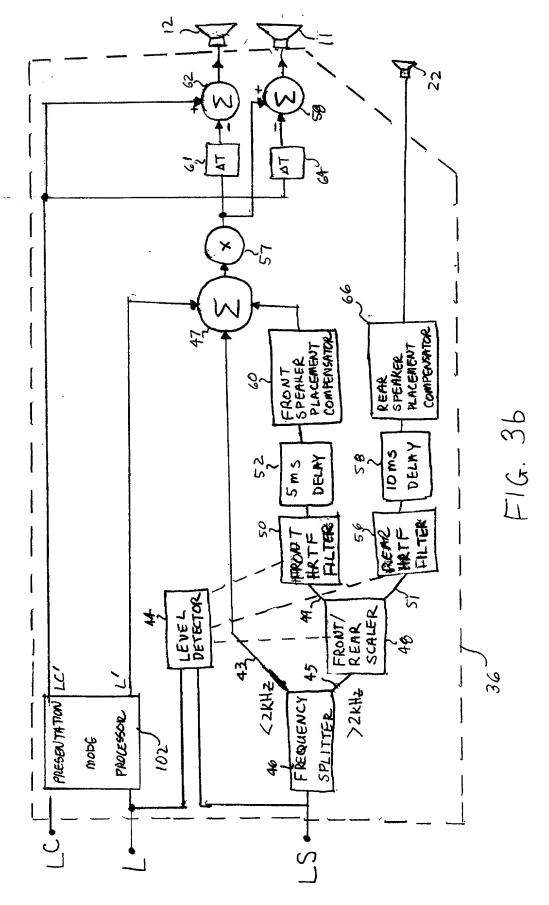


CASE 3 FULL RANGE REAR SPEAKER


Complete Complete September 1997

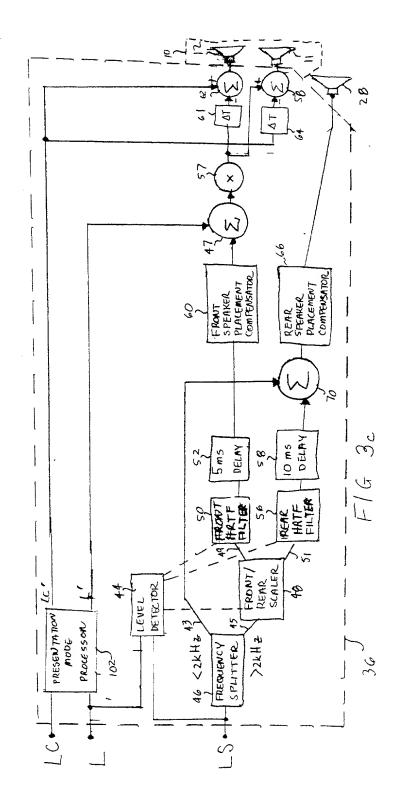


USER SELECTIBLE CASE 1, 2, 08 3

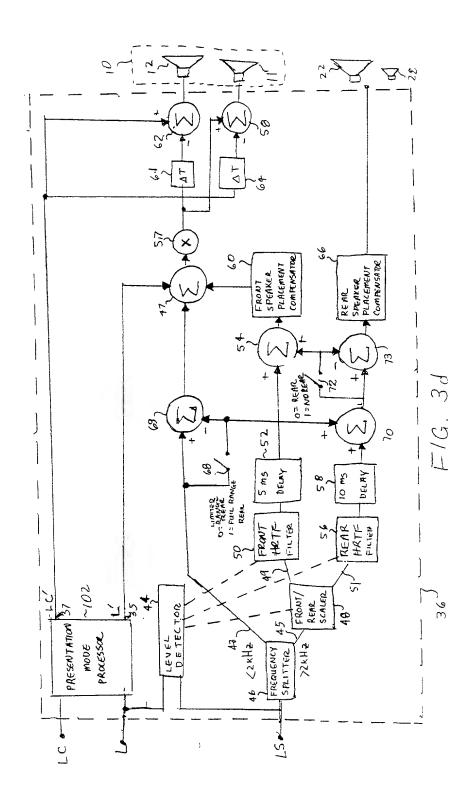


これのことのなるないのできないことのできる

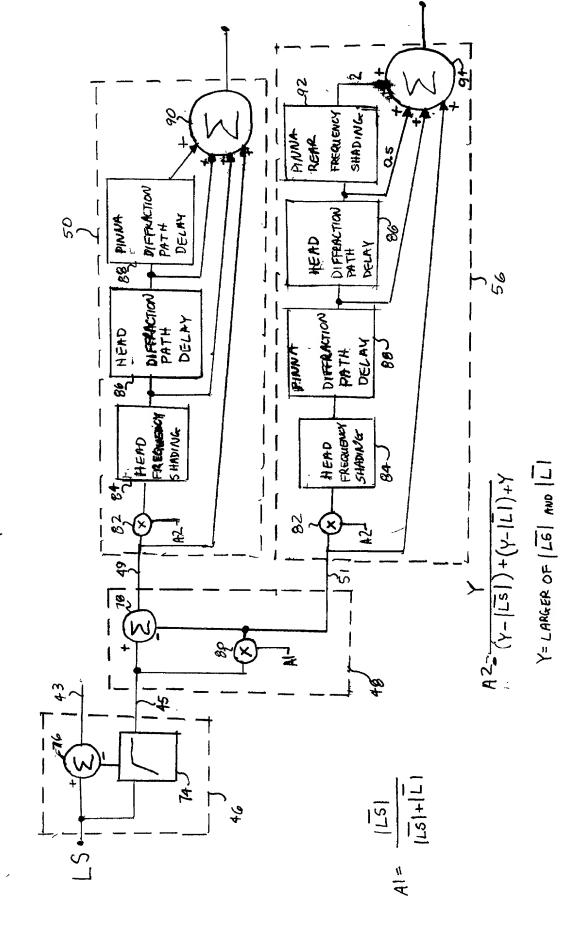



F16.4

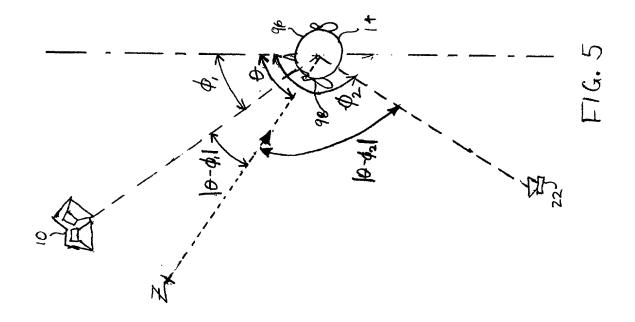


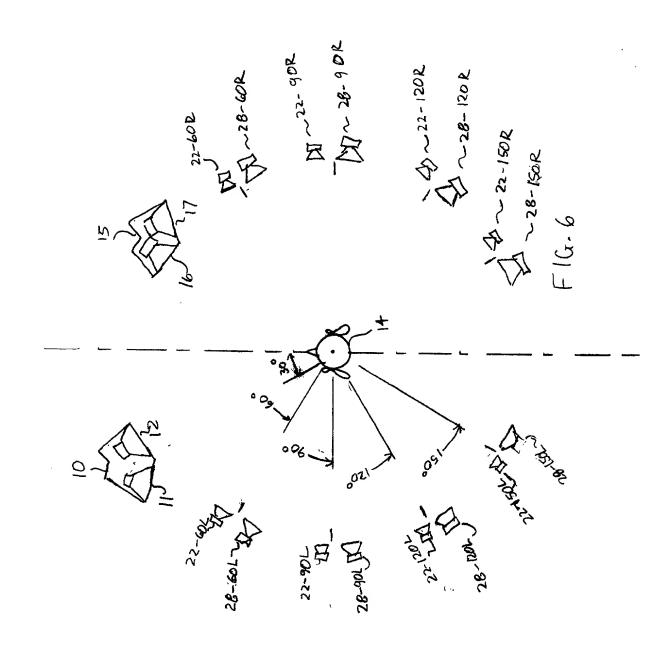


mo7.	#REGUENCY	- - - 1	71	3 7	_\.	OR 28-601	706-92 00	101-82 10 101-82 10	7051-82 10						——————————————————————————————————————
•	KYSTEM		E 4	B	DYNAMIC	RANGE	CON TRUC	CIRCUITRY							42
	~	•	LF ARRAY 38a (DRIVER P. ?	LF ARRAY306 PRINCED ?	DRIVER LEO	392 JOHNER 190	3987 BRIVER L 120	39c J DRIVER L 150	39 d						
The first state of the first sta	(W			DIRECTIONAL	processor										36
	97.6	CEMO	1.0		7.60	067		18	RC	\propto	R60	R30	R120	RIS	
DE CODER 1															
							QuDIO	SIGNAL	32						F1G. 7

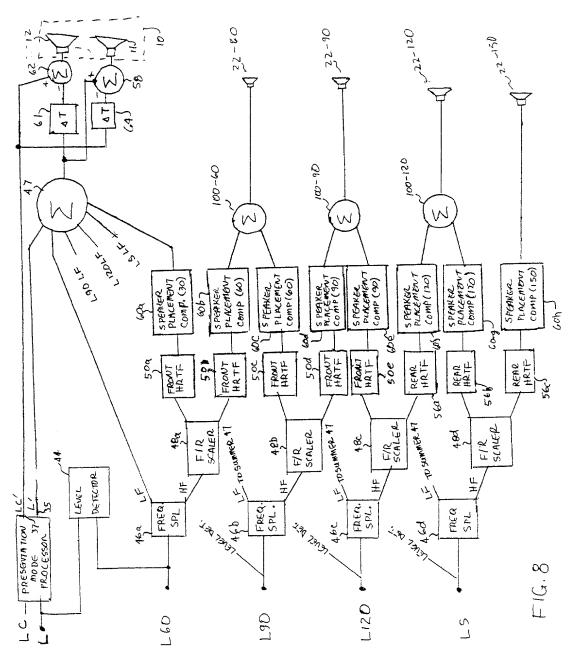

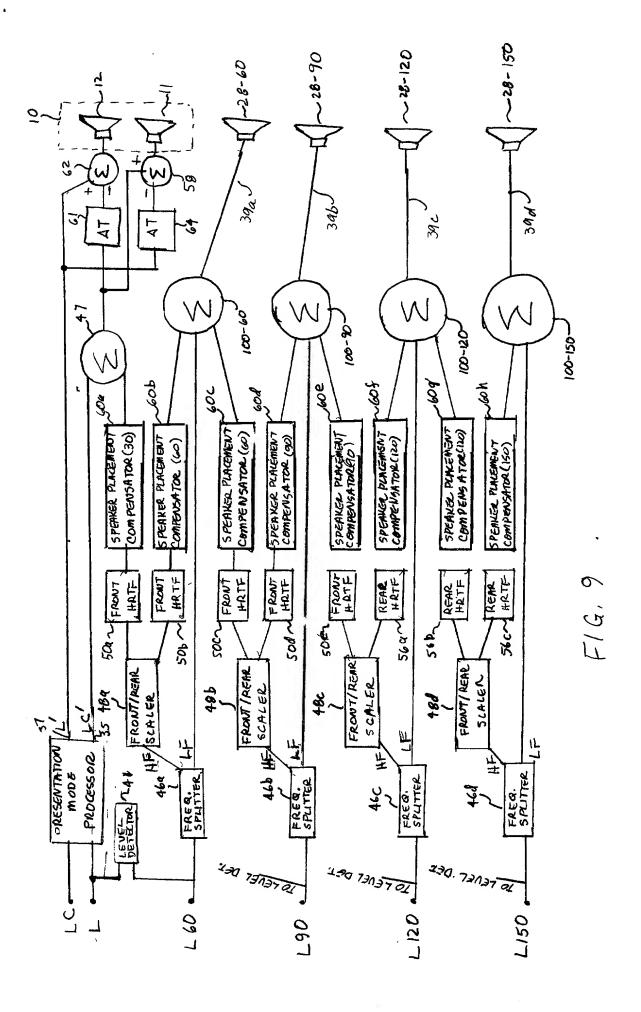








FIG. 106





FIG. 100



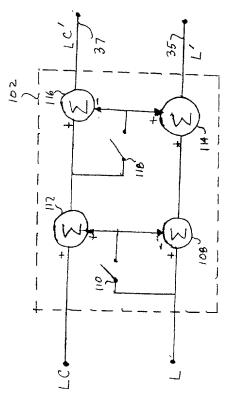

REF.	100	901	100	100
PRIMARY 104 PRIMARY 106 REF.	L + L S(LF) 10a	, 57	L+LC+15(LF) 10C	10C+15(1F) 10C
PRIMARY 104 .	LC	7+70	1	1
L'CONTEUT' TERM. 35)	1	ļ	7+70	7+46
SWITCH 118 LC'CONTENT (TERM. 37)	1°C	7+7	ì	1
SWITCH 118 POSITION	OPEN	OPEN	CLOSED	C105ep
POSITION	OPEN	C708ED	O PEN	C1086D